

 **AUFINE**



AUFINE TYRE CO.,LIMITED

 **+86-532-88960296,88962532**

 **www.aufine.com**

 **info@aufine.com**



18 Years History, Wide Range of Services

18/ Established in 2005, AUFINE has been deeply involved in the truck tire industry for 18 years.

130+ AUFINE has provided high-quality product solutions to customers in more than 130 countries and regions.

Product Innovation, Authorized Certification


40+

AUFINE has successfully applied for more than 40 tire patents, continuously upgrading product performance.



10+

AUFINE has passed DOT, ECE, E-MARK, S-MARK, GCC, CCC, NOM, REACH, BIS, SONCAP, INMETRO, LATU and other authoritative certifications.

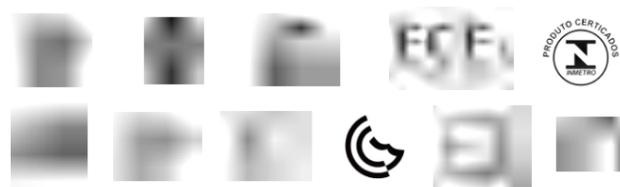

MATERIAL PERFORMANCE TESTING

AUFINE enhance tire strength by testing tire material performance under extreme temperature conditions in order to improve durability and safety.



FINITE ELEMENT ANALYSIS

AUFINE test to predict how a new tire compound and tread design will behave under stress in order to improve tire safety and performance.



FORCE AND MOMENT TESTING

AUFINE put our tires through maximum load tests to determine how stress will affect tire footprint and tire performance.



ROLLING RESISTANCE ANALYTICS

AUFINE study tire compounds in order to build tires that reduce the amount of energy required to roll without compromising traction.



RHEOLOGICAL PROPERTY STUDIES

AUFINE evaluate the properties of our tire compounds to determine how they will react to heat, cold, force, weight, and pressure.



NOISE REDUCTION ANALYTICS

AUFINE test tire designs to reduce vibration and tire noise without affecting tire handling or durability.

TABLE OF CONTENTS

7.00R16LT	5	275 /80R22.5	17
7.50R16LT	5	11R22.5	19
8.25R16LT	5	12R22.5	23
9.00R20	7	13R22.5	23
10.00R20	7	11R24.5	25
11.00R20	9	295 /80R22.5	27
12.00R20	9	315 /70R22.5	29
12.00R24	11	295 /60R22.5	31
325 /95R24	11	295 /75R22.5	31
9.5R17.5	11	315 /60R22.5	31
215 /75R17.5	13	315 /80R22.5	33
235 /75R17.5	13	385 /55R22.5	35
225 /80R17.5	15	385 /65R22.5	35
225 /70R19.5	15		
245 /70R19.5	15		
255 /70R22.5	17		
275 /70R22.5	17		

7.00R16LT

GALAXY



AF18

PREMIUM



Regional
A25

CRUISER



AR11

7.00R16LT

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF18	7.00R16LT	14	13.0	118/114	L	5.50F	1320/1180	770	Steer/All potision	Mix
PREMIUM REGIONAL A25	7.00R16LT	14	11.0	118/114	L	5.50F	1320/1180	770	Steer/All potision	Regional
CRUISER AR11	7.00R16LT	14	11.5	118/114	L	5.50F	1500/1320	770	Steer/All potision	Regional

7.50R16LT

GALAXY



AF18

CONQUEROR



AF186

CRUISER



AR11

7.50R16LT

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF18	7.50R16LT	16	12.5	124/120	L	6.00G	1600/1400	870	Steer/All potision	Mix
CONQUEROR AF186	7.50R16LT	16	15.0	124/120	K	6.00G	1600/1400	870	Drive	Mix
CRUISER AR11	7.50R16LT	14	12.5	122/118	L	6.00G	1800/1600	770	Steer/All potision	Regional

8.25R16LT

GALAXY



AF18

CONQUEROR



AF186

PREMIUM



Regional
A25

8.25R16LT

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF18	8.25R16LT	16	12.5	128/124	M	6.50H	1800/1600	770	Steer/All potision	Mix
CONQUEROR AF186	8.25R16LT	16	15.5	128/124	K	6.50H	1800/1600	770	Drive	Mix
PREMIUM REGIONAL A25	8.25R16LT	16	13.0	128/124	L	6.50H	1800/1600	770	Steer/All potision	Regional

9.00R20

GALAXY



CONQUEROR



CONQUEROR



9.00R20

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF18	9.00R20	16	15.5	144/142	L	7.00	2800/2650	900	Steer/All position	Mix
CONQUEROR AF142	9.00R20	16	18.5	144/142	L	7.00	2800/2650	900	Drive	Mix
CONQUEROR AF186	9.00R20	16	18.5	144/142	K	7.00	2800/2650	900	Drive	Mix

10.00R20

GALAXY



CONQUEROR



CONQUEROR



10.00R20



SMART



SMART



Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF18	10.00R20	18	16.5	149/146	L	7.00	3250/3000	930	Steer/All position	Mix
CONQUEROR AF186	10.00R20	18	19.5	149/146	K	7.50	3250/3000	930	Drive	Mix
CONQUEROR AF97	10.00R20	18	20.5	149/146	J	7.50	3250/3000	930	Drive	Off road
SMART AER5	10.00R20	18	16.5	149/146	K	7.50	3250/3000	930	Steer/All Position	Regional
SMART AEM5	10.00R20	18	17.9	149/146	J	7.50	3250/3001	930	Steer/All Position	Mix

11.00R20

GALAXY



AF156

GALAXY



AF17

GALAXY



AF18

CONQUEROR



AF97

ENERGY



ADR2

SMART



AER5

11.00R20

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF156	11.00R20	18	14.8	152/149	K	8.00	3550/3250	930	Steer/All position	Long Haul/Regional
GALAXY AF17	11.00R20	18	14.5	152/149	L	8.00	3550/3250	930	Steer/All position	Regional
GALAXY AF18	11.00R20	18	17.0	152/149	L	8.00	3550/3250	930	Steer/All position	Mix
CONQUEROR AF97	11.00R20	18	26.5	152/149	J	8.00	3550/3250	930	Drive	Off road
ENERGY ADR2	11.00R20	18	20.5	152/149	L	8.00	3550/3250	930	Drive	Regional
SMART AER5	11.00R20	18	16.5	152/149	K	8.00	3550/3250	930	Steer/All Position	Regional

12.00R20

GALAXY



AF18

CONQUEROR



AF186

CONQUEROR



AF91

CONQUEROR



AF97

SMART



AEM5

SMART



ADM6++

SMART



DR10

12.00R20

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF18	12.00R20	20	17.5	156/153	L	8.50	4000/3650	900	Steer/All Position	Mix
CONQUEROR AF186	12.00R20	18	21.5	154/151	K	8.50	3750/3450	830	Drive	Mix
CONQUEROR AF91	12.00R20	18	18.5	154/151	L	8.50	3750/3450	830	Drive	Mix
CONQUEROR AF97	12.00R20	18	21.5	154/151	J	8.50	3750/3450	830	Drive	Off Road
SMART AEM5	12.00R20	22	17.9	158/155 (156/153)	F(J)	8.50	4250/3875	970	Steer/All Position	Mix
SMART ADM6++	12.00R20	24	21.4	160/157	D	8.50	4500/4125	970	Drive	Mix
SMART DR10	12.00R20	22	17.4	158/155 (156/153)	J(K)	8.50	4250/3875	970	Drive	Regional

12.00R24

GALAXY

GAXALY

CONQUEROR

ENERGY



ENERGY

SMART



325/95R24

9.5R17.5

SMART

MASTER

SMART

SMART



12.00R24

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF18	12.00R24	20	14.5	160/157	K	8.50	4500/4125	900	Steer/All Position	Mix
GALAXY AF11	12.00R24	20	14.5	160/157	K	8.50	4500/4125	900	Steer/All Position	Regional
CONQUEROR AF97	12.00R24	20	21.0	160/157	K	8.50	4500/4125	900	Drive	Off Road
ENERGY AER8	12.00R24	20	14.5	160/157	K	8.50	4500/4125	900	Steer/All Position	Regional
ENERGY ADM8	12.00R24	20	18.0	160/157	K	8.50	4500/4125	900	Drive	Mix
SAMRT DM63	12.00R24	20	18.0	160/157	K	8.50	4500/4125	900	Drive	Mix

325/95R24

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
SMART AEL5	325/95R24	22	15.0	162/160	K	9.00	4750/4000	830	Steer/All Position	Long Haul
MASTER MAS400	325/95R24	22	15.6	162/160	K	9.00	4750/4000	830	Steer/All Position	Mix

9.5R17.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
SMART AEL17	9.5R17.5	18	13.6	143/141	J	6.75	2725/2575	875	Steer/All potision	Long Haul
SMART ADM68	9.5R17.5	18	15.9	143/141	J	6.75	2725/2575	875	Drive	Mix

215/75R17.5

GALAXY



CONQUEROR



SMART



SMART



SMART



SMART



235/75R17.5

GALAXY



CONQUEROR



SMART



SMART



SMART



SMART



215/75R17.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF177	215/75R17.5	16	12.5	135/133	J	6.00	2180/2060	860	Steer/All Position	Long Haul
CONQUEROR AF717	215/75R17.5	14	14.5	126/124	M	6.00	1700/1600	700	Drive	Long Haul
SMART AEL15	215/75R17.5	16	12.1	135/133	J	6.00	2180/2060	865	Steer/All Position	Long Haul
SMART AEL18	215/75R17.5	18	14.5	135/133	J	6.00	2180/2060	850	Steer/All Position	Long Haul
SMART AU20	215/75R17.5	18	13.6	135/133	J	6.00	2180/2060	850	Steer/All Position	Urban Bus
SMART DR10	215/75R17.5	16	13.6	135/133	J	6.00	2180/2060	865	Drive	Regional



235/75R17.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF177	235/75R17.5	18	13.0	143/141	J	6.75	2725/2575	875	Steer/All Position	Long Haul
CONQUEROR AF717	235/75R17.5	16	15.5	132/130	M	6.75	2000/1900	775	Drive	Long Haul
SMART AEL15	235/75R17.5	18	12.1	143/141	J	6.75	2725/2575	865	Steer/All Position	Long Haul
SMART AEL18	235/75R17.5	18	13.6	143/141	J	6.75	2725/2575	875	Steer/All Position	Long Haul
SMART AU20	235/75R17.5	18	13.6	143/141	J	6.75	2725/2575	875	Steer/All Position	Urban Bus
SMART DR10	235/75R17.5	18	17.1	143/141	J	6.75	2725/2575	865	Drive	Regional

225/80R17.5

SMART



SMART



SMART



225/70R19.5

GALAXY



SMART



GALAXY



225/80R17.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
SMART AER7	225/80R17.5	16	15.5	123/122	L	6.75	1550/1500	700	Steer/All Position	Regional
SMART ADM9	225/80R17.5	16	17.0	123/122	L	6.75	1550/1500	700	Drive	Mix
SMART AEH7	225/80R17.5	16	18.0	123/122	J	6.75	1550/1500	700	Drive	Off Road

225/70R19.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF177	225/70R19.5	14	13.0	128/126	M	6.75	1800/1700	760	Steer/All Position	Long Haul
SMART AEL18	225/70R19.5	14	14.0	128/126	M	6.75	1800/1700	760	Steer/All Position	Long Haul

245/70R19.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF177	245/70R19.5	18	12.5	143/141	J	7.50	2725/2575	875	Steer/All Position	Long Haul

255/70R22.5

GALAXY



SMART



255/70R22.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF177	255/70R22.5	16	13.0	140/137	M	7.50	2500/2300	830	Steer/All Position	Long Haul
SMART A303	255/70R22.5	16	14.0	140/137	M	7.50	2500/2300	830	Steer/All Position	Long Haul

275/70R22.5

GALAXY



CONQUEROR



SMART



Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF177	275/70R22.5	18	16.5	148/145	M	8.25	3150/2900	900	Steer/All Position	Long Haul
CONQUEROR AF717	275/70R22.5	18	18.5	148/145	M	8.25	3150/2900	900	Drive	Long Haul
SMART AEL18	275/70R22.5	18	16.4	148/145	L	8.25	3150/2900	900	Steer/All Position	Long Haul

275/80R22.5

SMART




SMART



SMART



Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
SMART AEL18	275/80R22.5	18	15.1	149/146	M	8.25	3250/3000	900	Steer/All Position	Long Haul
SMART FR10	275/80R22.5	18	14.6	149/146	M	8.25	3250/3000	850	Steer/All Position	Regional
SMART DR10	275/80R22.5	18	17.4	149/146	M	8.25	3250/3000	850	Drive	Regional

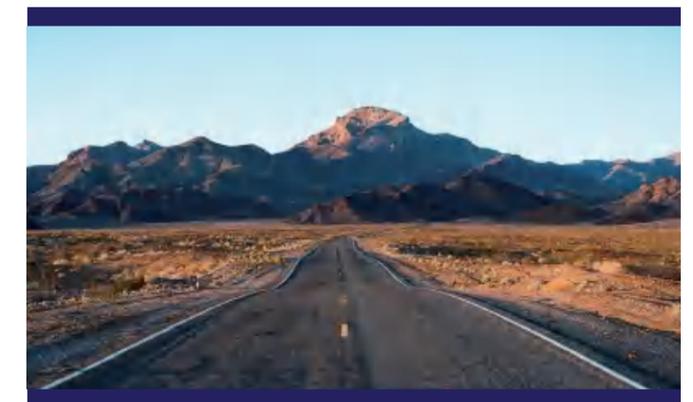

11R22.5

11R22.5

GALAXY



ENERGY



SMART



Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF18	11R22.5	16	15.5	146/143	M	8.25	3000/2725	830	Steer/All Position	Mix
GALAXY AF177	11R22.5	16	16.5	146/143	M	8.25	3000/2725	830	Steer/All Position	Long Haul
ENERGY AER2	11R22.5	16	16.5	146/143	M	8.25	3000/2725	830	Steer/All Position	Regional
CONQUEROR AF559	11R22.5	16	16.5	146/143	M	8.25	3000/2725	830	Drive	Mix
SMART AEL18	11R22.5	18	15.5	149/146	L	8.25	3250/3000	900	Steer/All Position	Long Haul
SMART AEL15	11R22.5	16	14.6	148/145	M	8.25	3150/2900	850	Steer/All Position	Long Haul
SMART A303	11R22.5	18	15.5	149/146	L	8.25	3250/3000	930	Steer/All Position	Long Haul
SMART D707	11R22.5	18	23.0	149/146	L	8.25	3250/3000	930	Drive	Regional
SMART ADR7	11R22.5	18	20.4	149/146	L	8.25	3250/3000	930	Drive	Regional
SMART AEH9	11R22.5	18	22.2	149/146	J	8.25	3250/3000	930	Drive	Off Road
SMART ADR117	11R22.5	16	22.5	146/143	L	8.25	3000/2725	830	Drive	Regional
SMART ADR113	11R22.5	16	22.5	146/143	M	8.25	3000/2725	830	Drive	Regional
SMART ADR118	11R22.5	16	23.0	146/143	L	8.25	3000/2725	830	Drive	Regional
SMART ADM111	11R22.5	16	25.4	146/143	L	8.25	3000/2725	830	Drive	Mix



12R22.5

13R22.5

GALAXY



GALAXY



CONQUEROR



CONQUEROR



SMART



ENERGY



Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF18	12R22.5	18	17.0	152/149	M	9.00	3550/3250	930	Steer/All Position	Mix
GALAXY AF177	12R22.5	18	17.0	152/149	M	9.00	3550/3250	930	Steer/All Position	Long Haul
CONQUEROR AF557	12R22.5	18	20.0	152/149	M	9.00	3550/3250	930	Drive	Long Haul
CONQUEROR AF88	12R22.5	18	20.0	152/149	K	9.00	3550/3250	930	Drive	Mix
SMART ADR7	12R22.5	18	22.2	152/149	L	9.00	3550/3250	930	Drive	Regional
SMART AEH9	12R22.5	20	23.7	154/151	F	9.00	3750/3450	970	Drive	Off Road

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF18	13R22.5	18	17.5	154/151	L	9.75	3750/3450	830	Steer/All Position	Mix
CONQUEROR AF88	13R22.5	18	21.0	154/151	K	9.75	3750/3450	830	Drive	Mix
CONQUEROR AF97	13R22.5	18	22.0	156/150	K	9.75	4000/3350	860	Drive	Off Road
ENERGY AEM3	13R22.5	18	17.5	156/150	K	9.75	4000/3350	860	Steer/All Position	Mix
ENERGY ADM2	13R22.5	18	22.0	156/150	K	9.75	4000/3350	860	Drive	Mix
ENERGY AEH2	13R22.5	18	24.0	156/150	G	9.75	4000/3350	860	Drive	Off Road

11R24.5

GALAXY



CONQUEROR



SMART



11R24.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF177	11R24.5	16	16.5	149/146	L	8.25	3250/3000	830	Steer/All Position	Long Haul
CONQUEROR AF559	11R24.5	16	22.5	149/146	L	8.25	3250/3000	830	Drive	Mix
SMART AEL15	11R24.5	16	14.6	149/146	M	8.25	3250/3000	830	Steer/All Position	Long Haul
SMART A303	11R24.5	18	15.5	152/149	L	8.25	3550/3250	930	Steer/All Position	Long Haul
SMART D707	11R24.5	18	23.0	152/149	L	8.25	3550/3250	930	Drive	Regional
SMART ADR113	11R24.5	16	22.5	149/146	M	8.25	3250/3000	830	Drive	Regional
SMART ADR118	11R24.5	16	23.0	149/146	L	8.25	3250/3000	830	Drive	Regional
SMART ADM111	11R24.5	16	25.4	149/146	L	8.25	3250/3000	830	Drive	Mix
SMART AEH9	11R24.5	18	22.2	152/149	F	8.25	3550/3250	930	Drive	Off Road



295/80R22.5

295/80R22.5

GALAXY



CONQUEROR



ENERGY



SMART



APEX



CRUISER



MASTER



Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF177	295/80R22.5	18	16.5	154/151	M	9.00	3750/3450	900	Steer/All Position	Long Haul
GALAXY AF667	295/80R22.5	18	15.0	154/151	M	9.00	3750/3450	900	Steer/All Position	Long Haul
CONQUOROR AF557	295/80R22.5	18	20.0	154/151	M	9.00	3750/3450	900	Drive	Long Haul
CONQUOROR AF88	295/80R22.5	18	19.0	154/151	K	9.00	3750/3450	900	Drive	Mix
ENERGY AEL2	295/80R22.5	18	16.5	154/151 (152/148)	L (M)	9.00	3750/3450	900	Steer/All Position	Long Haul
ENERGY ADR3	295/80R22.5	18	21.0	154/151 (152/148)	L (M)	9.00	3750/3450	900	Drive	Regional
SMART AEL5	295/80R22.5	20	16.5	154/150 (152/148)	L(M)	9.00	3750/3350	850	Steer/All Position	Long Haul
SMART AEL18	295/80R22.5	18	14.1	152/149	M	9.00	3550/3250	900	Steer/All Position	Long Haul
SMART ADR6	295/80R22.5	20	20.0	154/149	L	9.00	3750/3250	850	Drive	Regional
SMART ADR8	295/80R22.5	20	20.5	154/150 (152/148)	L(M)	9.00	3750/3250	850	Drive	Regional
SMART AEL9	295/80R22.5	20	21.0	154/149	F	9.00	3750/3250	850	All Position	Off road
APEX AEL7	295/80R22.5	20	16.5	154/149	L	9.00	3750/3250	850	Steer/All Position	Long Haul
APEX ADR9	295/80R22.5	20	20.5	154/149	L	9.00	3750/3250	850	Drive	Regional
PREMIUM LINE A	295/80R22.5	18	17.0	152/149	L	9.00	3500/3250	900	Steer/All Position	Long Haul
PREMIUM REGIONAL D	295/80R22.5	18	21.0	152/149	L	9.00	3550/3250	900	Drive	Regional
CRUISER AL1	295/80R22.5	20	17.0	154/150 (152/148)	L(M)	9.00	3750/3350	850	Steer/All Position	Long Haul
CRUISER DR2	295/80R22.5	20	21.0	154/150 (152/148)	L(M)	9.00	3750/3350	850	Drive	Long Haul
MASTER MAS100	295/80R22.5	20	16.4	154/149	L	9.00	3750/3250	850	Steer/All Position	Long Haul
MASTER MAS200	295/80R22.5	20	20.4	154/149	L	9.00	3750/3250	850	Drive	Long Haul
MASTER MAS500	295/80R22.5	20	20.0	154/149	L	9.00	3750/3250	850	Drive	Long Haul



315/70R22.5

GALAXY



ENERGY



SMART



APEX

PREMIUM



CRUISER



315/70R22.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF177	315/70R22.5	18	15.5	154/150	M	9.00	4000/3350	900	Steer/All Position	Long Haul
CONQUEROR AF717	315/70R22.5	18	18.0	156/150	L	9.00	4000/3350	900	Drive	Long Haul
ENERGY AEL2	315/70R22.5	18	15	156/150 154/150	L(M)	9.00	4000/3350	900	Steer/All Position	Long Haul
ENERGY AER3	315/70R22.5	18	15	156/150 (154/150)	L M	9.00	4000/3550	900	Steer/All Position	Regional
ENERGY ADL2	315/70R22.5	18	18.5	154/150 152/148	L(M)	9.00	3750/3350	900	Drive	Long Haul
ENERGY ADR3	315/70R22.5	18	22.0	154/150 152/148	L (M)	9.00	3750/3350	900	Drive	Regional
SMART ADR8	315/70R22.5	20	20.0	156/150 (154/150)	L (M)	9.00	4000/3250	900	Drive	Long Haul
APEX ADR9	315/70R22.5	20	20.0	156/150 (154/150)	L(M)	9.00	4000/3350	900	Drive	Regional
PREMIUM LINE A	315/70R22.5	18	16	156/150 (154/150)	L(M)	9.00	4000/3550	900	Steer/All Position	Long Haul
PREMIUM REGIONAL D	315/70R22.5	18	20.6	154/152 (152/148)	L (M)	9.00	3750/3450	900	Drive	Regional
CRUISER DR2	315/70R22.5	20	20.6	156/150 (154/150)	L (M)	9.00	4000/3350	900	Drive	Long Haul



295/60R22.5



295/60R22.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
SMART TR88	295/60R22.5	18	14.6	150/147	K	9.00	3350/3075	900	Trailer	Regional
SMART DR30	295/60R22.5	18	17.4	150/147 (149/146)	K(L)	9.00	3350/3075	900	Drive	Regional

295/75R22.5



295/75R22.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF558	295/75R22.5	16	15.0	146/143	L	9.00	3000/2725	830	Steer/All Position	Long Haul
CONQUEROR AF559	295/75R22.5	16	22.5	146/143	L	9.00	3000/2725	830	Drive	Mix
SMART A303	295/75R22.5	18	15.0	149/146	L	9.00	3250/3000	930	Steer/All Position	Long Haul
SMART D707	295/75R22.5	18	23.0	149/146	L	9.00	3250/3000	930	Drive	Long Haul
SMART T909	295/75R22.5	18	10.5	149/146	L	9.00	3250/3000	930	Trailer	Long Haul

315/60R22.5



315/60R22.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
SMART TR88	315/60R22.5	20	14.6	153/150	L	9.75	3650/3350	900	Trailer	Regional
SMART DR30	315/60R22.5	18	17.9	152/148	L	9.00	3550/3150	900	Drive	Regional



315/80R22.5

315/80R22.5



Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF18	315/80R22.5	20	17.0	157/154	M	9.00	4125/3750	900	Steer/All Position	Mix
GALAXY AF177	315/80R22.5	20	16.5	157/154	M	9.00	4125/3750	900	Steer/All Position	Long Haul
GALAXY AF667	315/80R22.5	20	15.0	157/154	M	9.00	4125/3750	900	Steer/All Position	Long Haul
CONQUEROR AF717	315/80R22.5	20	18.0	157/154	M	9.00	4125/3750	900	Drive	Long Haul
CONQUEROR AF557	315/80R22.5	20	20.0	157/154	M	9.00	4125/3750	900	Drive	Long Haul
CONQUEROR AF88	315/80R22.5	20	20.0	157/154	K	9.00	4125/3750	900	Drive	Mix
ENERGY AEL2	315/80R22.5	20	16.5	156/150 (154/150)	L(M)	9.00	4000/3350	850	Steer/All Position	Long Haul
ENERGY AER3	315/80R22.5	20	16.5	156/150 (154/150)	L(M)	9.00	4000/3350	850	Steer/All Position	Regional
ENERGY AEM2	315/80R22.5	20	16.5	157/154	K	9.00	4125/3750	900	Steer/All Position	Mix
ENERGY ADL2	315/80R22.5	20	21.0	156/150 (154/150)	L(M)	9.00	4000/3350	850	Drive	Long Haul
ENERGY ADR3	315/80R22.5	20	21.0	156/150 (154/150)	L(M)	9.00	4000/3350	850	Drive	Regional
ENERGY ADM2	315/80R22.5	20	22.0	157/154	K	9.00	4125/3750	900	Drive	Mix
SMART AEL5	315/80R22.5	22	15.5	160/157 (157/154)	J(K)	9.00	4500/4125	950	Steer/All Position	Long Haul
SMART ADR8	315/80R22.5	22	22.0	160/157 (157/154)	J(K)	9.00	4500/4125	950	Drive	Regional
SMART ADR18	315/80R22.5	22	21.0	160/157	K	9.00	4500/4125	950	Drive	Regional
SMART DM61	315/80R22.5	22	21.7	160/157 (157/154)	J(K)	9.00	4500/4125	950	Drive	Mix
SMART ADM818	315/80R22.5	22	22.6	160/157 (157/154)	J(K)	9.00	4500/4125	950	Drive	Regional
SMART AEH8	315/80R22.5	22	25.0	160/157	F	9.00	4500/4125	950	Drive	Off-Road
APEX AEL7	315/80R22.5	22	15.5	160/157 (157/154)	J(K)	9.00	4500/4125	950	Steer/All Position	Long Haul
APEX ADR9	315/80R22.5	22	22.0	160/157 (157/154)	J(K)	9.00	4500/4125	950	Drive	Regional
PREMIUM LINE A	315/80R22.5	22	16.7	160/157 (157/154)	J(K)	9.00	4500/4125	900	Steer/All Position	Long Haul
PREMIUM REGIONAL D	315/80R22.5	22	23.8	160/157 (157/154)	J(K)	9.00	4500/4125	900	Drive	Regional
CRUISER AL1	315/80R22.5	22	16.0	160/157 (157/154)	J(K)	9.00	4500/4125	950	Steer/All Position	Long Haul
CRUISER DR2	315/80R22.5	22	22.6	160/157 (157/154)	J(K)	9.00	4500/4125	950	Drive	Long Haul
MASTER MAS100	315/80R22.5	20	15.6	157/154	L	9.00	4125/3750	900	Steer/All Position	Long Haul
MASTER MAS200	315/80R22.5	20	21.4	157/154	L	9.00	4125/3750	900	Drive	Regional

385/55R22.5

ENERGY



SMART



SMART



385/65R22.5

GALAXY



CONQUEROR



ENERGY



SMART



APEX



PREMIUM



CRUISER



385/55R22.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
ENERGY ATR2	385/55R22.5	20	15.5	160	J	12.25	4500/-	900	Trailer	Mix
SMART AEL5	385/55R22.5	24	15.5	164(142)	J(K)	12.25	5000/-	950	Steer/All Position	Long Haul
SMART ATR9	385/55R22.5	24	15.5	164(142)	J(K)	12.25	5000/-	950	Trailer	Regional

385/65R22.5

Pattern	Size	PR	Tread Depth	Load Index	Speed Rating	Standard Rim	Max Tire Load	Max Tire Pressure	Position	Road Condition
			mm				kg.	kPa.		
GALAXY AF327	385/65R22.5	20	16.5	160	K	11.75	4500/-	900	Steer/All Position	Long Haul
GALAXY AF327	385/65R22.5	22	16.5	162(160)	K(L)	11.75	4750/-	950	Steer/All Position	Long Haul
CONQUEROR AF197	385/65R22.5	20	16.5	160	K	11.75	4500/-	900	Drive	Regional
ENERGY AEL2	385/65R22.5	20	16.5	160(158)	K(L)	11.75	4500/-	900	Steer/All Position	Long Haul
ENERGY ATR2	385/65R22.5	20	16.5	160(158)	K(L)	11.75	4500/-	900	Trailer	Regional
ENERGY ATR3	385/65R22.5	20	16.5	160(158)	K(L)	11.75	4500/-	900	Trailer	Regional
ENERGY AEM	385/65R22.5	20	16.5	160(158)	K(L)	11.75	4500/-	900	Steer/All Position	Mix
SMART AEL5	385/65R22.5	24	16.5	164(162)	J(K)	11.75	5000/-	950	Steer/All Position	Long Haul
SMART ATL5	385/65R22.5	24	13.5	164(162)	J(K)	11.75	5000/-	950	Trailer	Long Haul
SMART ATR9	385/65R22.5	24	17.0	164(162)	J(K)	11.75	5000/-	950	Trailer	Regional
APEX A11	385/65R22.5	24	16.5	164(162)	J(K)	11.75	5000/-	950	Steer/All Position	Long Haul
PREMIUM REGIONAL T	385/65R22.5	24	18.5	164(162)	J(K)	11.75	5000/-	950	Trailer	Regional
CRUISER AL1	385/65R22.5	24	16.5	164(162)	J(K)	11.75	5000/-	950	Steer/All Position	Long Haul